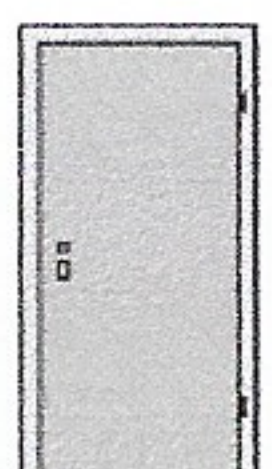


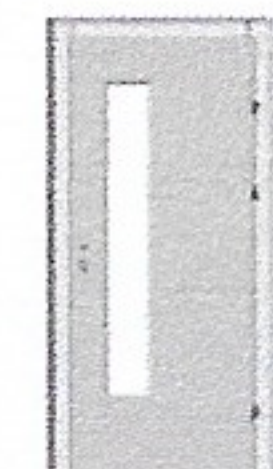
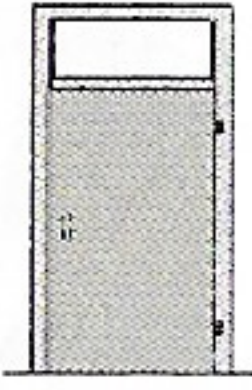
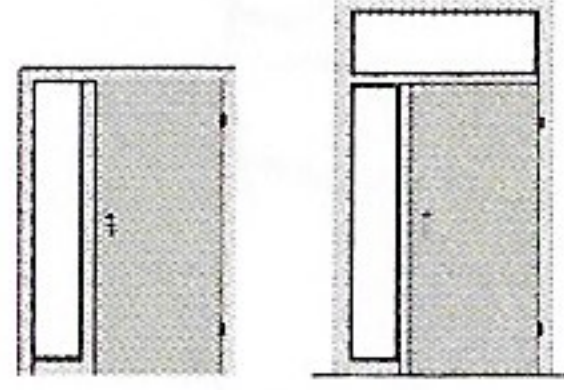
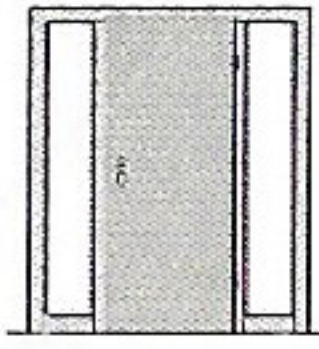
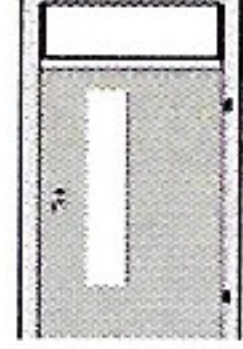
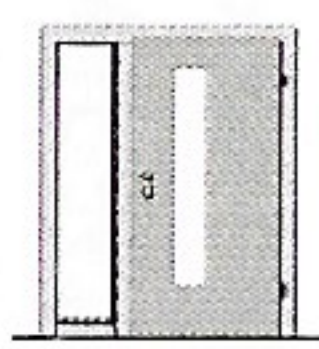
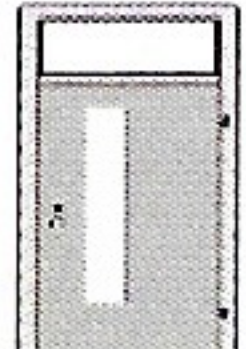
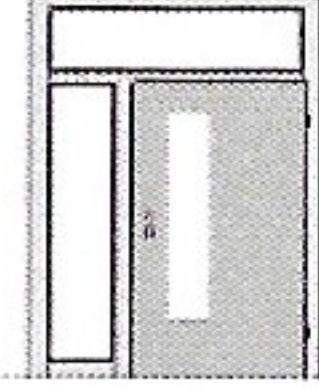


Declaration of Performance
DoP No. JL2022121ED-UK
22

Unique identification code of the product-type:	EXTERNAL DOORSETS ADVANCE-LINE ED SBD door ED Silence SIDELIGHT, ECO TOPLIGHT		
Type:	For % of glass of the doorset, see: Annex1. Product Naming Statement Non-glazed single leaf door, glazed single leaf door, with/without sidelight and/or toplight		
Intended use:	External door for domestic locations and commercial locations		
Manufacturer:	JELD-WEN Danmark A/S, Danmarksvej 9, DK-9670 Løgstør, Denmark www.jeld-wen.biz		
Authorised representative:	JELD-WEN UK LTD. Retford Road, Woodhouse Mill, Sheffield, South Yorkshire, S13 9WH, United Kingdom		
	AVCP System	Approved Test Laboratory / Approved Body No.	Designated standard
Systems of Assessment and Verification of Constancy of Performance (AVCP)	3	A = RISE Research Institutes of Sweden AB / No. 0402	EN 14351-1:2006 +A2:2016
		B = Force Technology / No. 0199	
		C = N/A	
		D = N/A	
		E = N/A	

Declared performances						
		ADVANCE-LINE ED SBD				Test laboratory
		Non-glazed single leaf door 	Glazed single leaf glassed area < 9 % 	Glazed single leaf glassed area > 9 – 20 % 	Glazed single leaf glassed area > 20 	
AVCP System 3	Watertightness (<i>Outswing</i>)	4A	4A	4A	4A	A
	Watertightness (<i>Inswing</i>)	3A / 7B ¹⁾	3A / 7B ¹⁾	3A / 7B ¹⁾	3A / 7B ¹⁾	A
	Dangerous substances	None	None	None	None	-
	Resistance to wind load	C3	C3	C3	C3	A
	Impact resistance	N/A	NPD	NPD	NPD	-
	Load-bearing capacity of safety devices	N/A	N/A	N/A	N/A	-
	Height	NPD	NPD	NPD	NPD	-
	Acoustic performance	30 (-4; -4) dB	30 (-4; -4) dB	30 (-4; -4) dB	30 (-4; -4) dB	B
	Thermal transmittance	0.95 W/m ² K	1.1 W/m ² K	1.15 W/m ² K	1.34 W/m ² K	A
	Radiation properties g:	N/A	NPD	NPD	NPD	-
	Radiation properties LT:	N/A	NPD	NPD	NPD	-
	Air permeability	4	4	4	4	A

Declared performances									
		ADVANCE-LINE ED SBD door with ED Silence SIDELIGHT / ECO TOPLIGHT						Test laboratory	
		Non-glazed single leaf door			Glazed single leaf door ²⁾				
		+ toplight 	+ sidelight with or without toplight 	+ 2 sidelights ³⁾ 	< 2,7 % glass + toplight 	< 16 % glass + sidelight 	> 2,7 - 30 % glass + toplight 		< 12 % glass + sidelight and toplight 
AVCP System 3	Watertightness (<i>Outswing</i>)	NPD	NPD	NPD	NPD	NPD	NPD	NPD	-
	Dangerous substances	None	None	None	None	None	None	None	-
	Resistance to wind load	NPD	NPD	NPD	NPD	NPD	NPD	NPD	-
	Impact resistance	NPD	NPD	NPD	NPD	NPD	NPD	NPD	-
	Load-bearing capacity of safety devices	N/A	N/A	N/A	N/A	N/A	N/A	N/A	-
	Height	NPD	NPD	NPD	NPD	NPD	NPD	NPD	-
	Acoustic performance	NPD	NPD	NPD	NPD	NPD	NPD	NPD	-
	Thermal transmittance	0.98 W/m ² K	1.16 W/m ² K	1.36 W/m ² K	1.03 W/m ² K	1.29 W/m ² K	1.22 W/m ² K	1.26 W/m ² K	A
	Radiation properties g	NPD	NPD	NPD	NPD	NPD	NPD	NPD	-
	Radiation properties LT	NPD	NPD	NPD	NPD	NPD	NPD	NPD	-
Air permeability	NPD	NPD	NPD	NPD	NPD	NPD	NPD	-	

Abbreviations:

N/A = not applicable

NPD = no performance determined

1) = 7B is only valid when mounted with a drop plate

2) = The term "Glazed single leaf door" means the glazed area of the door leaf + frame, excl. sidelight/toplight

3) = Size of complete doorset > 3,6 m²

The performance of the product identified above is in conformity with the set of declared performance/s.
This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011 as it has effect in the United Kingdom, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:

Nigel Dilks,
VP Product Management, Europe
(Name and function)

.....
(Place and date of issue)


.....
(Signature)

20th Dec 2022.
Sohihull,
West Midlands.